

45

## Netter Resonance Conveyor System Series *FlexiLink*



- High conveying performance by use of spring resonance
- Low air consumption
- Immediate starting and stopping
- Low unit weight






# NetterVibration



## Netter Resonance Conveyor System Series *FlexiLink*


Netter resonance conveyor systems in the FlexiLink series consist of:

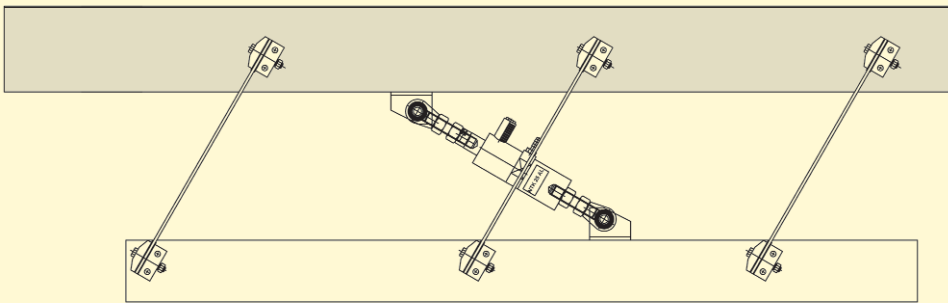

A conveyor trough, manufactured either by the client or as per the client's requirements

blade springs,  
a pneumatic linear vibrator series NTK with the *FlexiLink* connecting element

and the counter-weight (frame/floor)

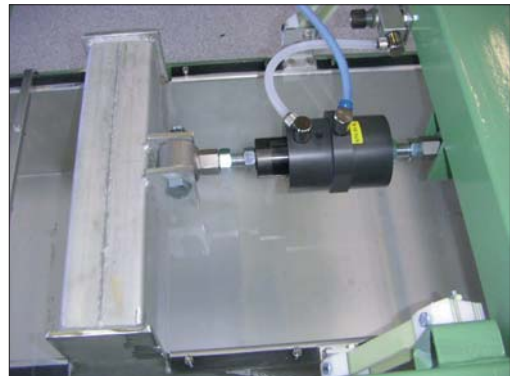

### Applications

Conveyor systems of the *FlexiLink* series serve to convey bulk material efficiently and gently.

### Design and functioning principle

The feeder system consists of a pneumatic linear vibrator of series NTK, blade springs and the *FlexiLink* connecting element.

This system uses the natural resonance of the springs in order to convey bulk materials. Once the trough starts to vibrate at the resonance frequency, very little additional energy is required to maintain the vibration. Even with varying loads, the trough continues to vibrate in resonance.

The amplitude can be adjusted by means of an optional exhaust throttle.

In addition to driving classic feeder troughs, the *FlexiLink* system can also be used to drive spiral feeders. The blade springs are then arranged in a circle in order to

accommodate the spiral feeder.

In addition to the standard versions, customized variants of the *FlexiLink* series are also available. Furthermore, all components can be supplied separately.

### Permissible operating conditions:

#### Drive Medium:

Compressed air or nitrogen (filter  $\leq 5 \mu\text{m}$ ), preferably with oil mist

#### Operating pressure:

2 bar to 6 bar

#### Ambient temperature:

5°C to 60°C

*NetterVibration* offers the accessories required for mounting, installation and control of vibrators and interval impactors.

### Netter provides solutions.

Consult our experienced application technicians.

### Netter GmbH

#### Germany

Fritz-Ullmann-Str. 9  
55252 Mainz-Kastel  
Tel. +49 6134 2901-0  
Fax +49 6134 2901-33

#### United Kingdom

2 Sandpiper Close  
Station Road  
Hednesford, WS12 4RN  
Tel. +44 1543 424990  
Fax +44 1543 423196

#### Switzerland

Erlenweg 4  
4310 Rheinfelden  
Tel. +41 61 8316200  
Fax +41 61 8311291

www.*NetterVibration*.com  
info@*NetterVibration*.com